

## DEL/ROC ivory



### Characteristics

- **Food quality.**
- Easy to clean.
- Resistance to abrasion.
- Resistance to chemicals.
- Excellent traction force.
- Good sliding on supports.

### Applications

- Medium or heavy loads.
- Possible accumulation.
- Full-loaded start.
- Long spacings.

### Compatible welding processes

- With welding iron and clamp.
- With hot air gun.
- With fasteners.

**Guides, profiles, holes... on demand.**



## DEL/ROC ivory

Material	<b>polyester elastomer</b>
Colour	<b>ivory</b>
Bottom side	<b>smooth</b>
Top side	<b>smooth</b>
Hardness	<b>100 ShA - 55 ShD</b>
Traction rating	
at 0.5% of tension	<b>9 daN/cm<sup>2</sup> of section</b>
at 1% of tension	<b>18 daN/cm<sup>2</sup> of section</b>
at 1.5% of tension	<b>27 daN/cm<sup>2</sup> of section</b>
Installation tension	<b>0.5 to 2% depending on conditions</b>
Extreme temperatures	<b>-30°C/+90°C</b>
Friction coefficient on	
HDPE	<b>0.15 - 0.2</b>
Steel	<b>0.35 - 0.4</b>
Stainless steel	<b>0.5</b>



Reference					
Flat belt width < 100 mm	Conveyor belt width ≥ 100 mm	Belt thickness (mm)	Maximum width (mm)	Minimum drum ø (mm)	Weight (kg / m <sup>2</sup> )
<b>DRPI1.5</b>	<b>DRBI1.5</b>	1.5	<b>650</b>	<b>30</b>	<b>1.8</b>
<b>DRPI2</b>	<b>DRBI2</b>	2	<b>650</b>	<b>40</b>	<b>2.4</b>
<b>DRPI2.5</b>	<b>DRBI2.5</b>	2.5	<b>650</b>	<b>60</b>	<b>3</b>
<b>DRPI3</b>	<b>DRBI3</b>	3	<b>650</b>	<b>80</b>	<b>3.6</b>
<b>DRPI4</b>	<b>DRBI4</b>	4	<b>650</b>	<b>160</b>	<b>4.8</b>
<b>DRPI5</b>	<b>DRBI5</b>	5	<b>650</b>	<b>200</b>	<b>6</b>

DEL/ROC belts with guide  
minimum drum ø (mm)



Belt thickness (mm)	DEL/ROC guide (100 ShA)					DEL/ROC cogged guide				
	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14
2	-	180	220	-	-	-	140	180	-	-
2.5	-	190	240	280	-	-	160	190	230	-
3	-	210	260	310	400	-	180	200	270	330
4	-	240	280	360	420	-	200	220	310	350
5	-	270	310	420	480	-	230	260	370	410

Belt thickness (mm)	V/FLEX guide (PVC 60 ShA)					V/FLEX cogged guide				
	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14
2	70	80	100	-	-	-	70	90	-	-
2.5	80	100	110	130	-	-	90	100	110	-
3	110	130	140	150	200	-	110	120	130	150
4	160	180	200	210	220	-	160	180	190	200
5	200	210	220	240	250	-	200	210	230	240



## DEL/ROC blue



Reference :  
**DR-B2EM**  
**DR-B3EM**  
**DR-B4EM**

### Characteristics

- **Food quality.**
- Easy to clean.
- Resistance to abrasion.
- Resistance to chemicals.
- Excellent traction rating.
- Good sliding on supports.

### Applications

- Medium or heavy loads.
- Possible accumulation.
- Full-Loaded start.
- Long spacings.


### Compatible welding processes

- With welding iron and clamp.
- With hot air gun.
- With fasteners.

**Guides, profiles, holes... on demand.**

### Smooth or **DIAMOND-EMBOSSED** bottom side

- Sliding improved on the belts' support in wet or fat conditions.
- Reduced traction efforts.

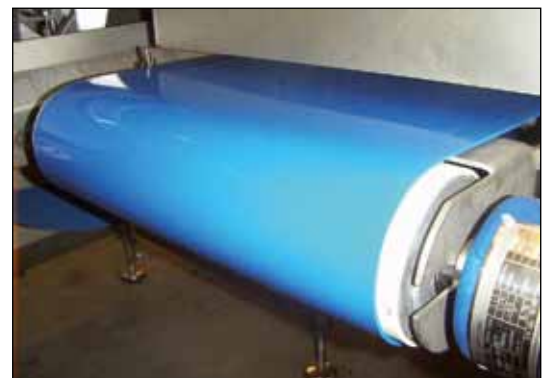

**DEL/ROC blue**

Material	<b>polyester elastomer</b>
Colour	<b>blue</b>
Bottom side	<b>smooth or diamond-embossed</b>
Top side	<b>smooth</b>
Hardness	<b>100 ShA - 55 ShD</b>
Traction rating	
at 0.5% of tension	<b>9 daN/cm<sup>2</sup> of section</b>
at 1% of tension	<b>18 daN/cm<sup>2</sup> of section</b>
at 1.5% of tension	<b>27 daN/cm<sup>2</sup> of section</b>
Installation tension	<b>0.5 to 2% depending on conditions</b>
Extreme temperatures	<b>-30°C/+90°C</b>
Friction coefficient on	
HDPE	<b>0.15 - 0.2</b>
Steel	<b>0.35 - 0.4</b>
Stainless steel	<b>0.5</b>



Reference					
Flat belt width < 100 mm	Conveyor belt width ≥ 100 mm	Belt thickness (mm)	Maximum width (mm)	Minimum drum ø (mm)	Weight (kg / m <sup>2</sup> )
<b>DRPB2</b>	<b>DRBB2</b>	<b>2</b>	<b>1000</b>	<b>40</b>	<b>2.4</b>
<b>DRPB3</b>	<b>DRBB3</b>	<b>3</b>	<b>1000</b>	<b>80</b>	<b>3.6</b>
<b>DRPB2EM</b>	<b>DRBB2EM</b>	<b>2</b>	<b>1000</b>	<b>40</b>	<b>2.4</b>
<b>DRPB3EM</b>	<b>DRBB3EM</b>	<b>3</b>	<b>1000</b>	<b>80</b>	<b>3.6</b>
<b>DRPB4EM</b>	<b>DRBB4EM</b>	<b>4</b>	<b>1000</b>	<b>160</b>	<b>4.8</b>



**DEL/ROC belts with guide**  
minimum drum ø (mm)



Belt thickness (mm)	DEL/ROC guide (100 ShA)					DEL/ROC cogged guide				
	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14
2	-	180	220	-	-	-	140	180	-	-
3	-	210	260	310	400	-	180	200	270	330

Belt thickness (mm)	V/FLEX guide (PVC 60 ShA)					V/FLEX cogged guide				
	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14
2	70	80	100	-	-	-	70	90	-	-
3	110	130	140	150	200	-	110	120	130	150



## DEL/FLEX green



### Characteristics

- **Standard quality.**
- Easy to clean.
- Resistance to abrasion.
- Resistance to cuttings.
- Resistance to tear.
- Resistance to chemicals.
- Flexible.



### Applications

- Medium loads.
- Small drum Ø.
- Abrasive conditions.
- U-shape belts.

### Compatible welding processes

- With welding iron and clamp.
- With hot air gun.
- With heating press.
- With fasteners.

**Guides, profiles, holes... on demand.**

### standard embossings



non-slip studded (PI)



sawtooth (US)



SG3 (SG)



diamond (LO)

Maximum width: 380 mm.

## DEL/FLEX green

Material	<b>polyurethane</b>
Colour	<b>green</b>
Bottom side	<b>smooth</b>
Top side	<b>smooth</b>
Hardness	<b>93 ShA</b>
Traction rating	
at 1% of tension	<b>10 daN/cm<sup>2</sup> of section</b>
at 2% of tension	<b>15 daN/cm<sup>2</sup> of section</b>
at 3% of tension	<b>20 daN/cm<sup>2</sup> of section</b>
Installation tension	<b>2 to 4% depending on conditions</b>
Extreme temperatures	<b>-20°C/+70°C</b>
Friction coefficient on	
HDPE	<b>0.25</b>
Steel	<b>0.5</b>
Stainless steel	<b>0.6</b>



Reference					
Flat belt width < 100 mm	Conveyor belt width ≥ 100 mm	Belt thickness (mm)	Maximum width (mm)	Minimum drum ø (mm)	Weight (kg / m <sup>2</sup> )
<b>DFPG1.5</b>	<b>DFBG1.5</b>	<b>1.5</b>	<b>650</b>	<b>20</b>	<b>1.8</b>
<b>DFPG2</b>	<b>DFBG2</b>	<b>2</b>	<b>650</b>	<b>30</b>	<b>2.5</b>
<b>DFPG3</b>	<b>DFBG3</b>	<b>3</b>	<b>650</b>	<b>70</b>	<b>3.75</b>
<b>DFPG4</b>	<b>DFBG4</b>	<b>4</b>	<b>650</b>	<b>100</b>	<b>5</b>
<b>DFPG5</b>	<b>DFBG5</b>	<b>5</b>	<b>650</b>	<b>140</b>	<b>6.25</b>

### DEL/FLEX belts with guide minimum drum ø (mm)



Belt thickness (mm)	<b>SOUPLEX guide (PU 85 ShA)</b>					<b>SOUPLEX cogged guide</b>				
	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14
2	90	100	140	-	-	-	70	80	-	-
3	110	130	180	220	280	-	85	100	140	200
4	130	170	220	260	350	-	100	120	160	220
5	160	200	250	300	400	-	140	150	180	240

Belt thickness (mm)	<b>SUPERFLEX guide (PU 70 ShA)</b>					<b>SUPERFLEX cogged guide</b>				
	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14
2	60	65	90	135	-	-	55	65	90	-
3	80	85	100	150	-	-	70	80	110	-
4	100	100	115	165	-	-	100	100	120	-
5	140	140	140	185	-	-	140	140	150	-



**SUPERFLEX 6 x 4 mm: consult us.**

## DEL/FLEX white



### Characteristics

- **Food quality.**
- Easy to clean.
- Resistance to abrasion.
- Resistance to cuttings.
- Resistance to tear.
- Resistance to chemicals.
- Flexible.

### Applications

- Medium loads.
- Small drum Ø.
- Abrasive conditions.
- U-shape belts.

### Compatible welding processes

- With welding iron and clamp.
- With hot air gun.
- With heating press.
- With fasteners.

**Guides, profiles, holes... on demand.**

### standard embossings



non-slip studded (PI)



sawtooth (US)



SG3 (SG)



diamond(LO)

Maximum width: 380 mm.



## DEL/FLEX white

Material	<b>polyurethane</b>
Colour	<b>white</b>
Bottom side	<b>smooth</b>
Top side	<b>smooth</b>
Hardness	<b>93 ShA</b>
Traction rating	
at 1% of tension	<b>10 daN/cm<sup>2</sup> of section</b>
at 2% of tension	<b>15 daN/cm<sup>2</sup> of section</b>
at 3% of tension	<b>20 daN/cm<sup>2</sup> of section</b>
Installation tension	<b>2 to 4% depending on conditions</b>
Extreme temperatures	<b>-20°C/+70°C</b>
Friction coefficient on	
HDPE	<b>0.25</b>
Steel	<b>0.5</b>
Stainless steel	<b>0.6</b>



Reference					
Flat belt width < 100 mm	Conveyor belt width ≥ 100 mm	Belt thickness (mm)	Maximum width (mm)	Minimum drum ø (mm)	Weight (kg / m <sup>2</sup> )
<b>DFPW1.5</b>	<b>DFBW1.5</b>	<b>1.5</b>	<b>650</b>	<b>20</b>	<b>1.8</b>
<b>DFPW2</b>	<b>DFBW2</b>	<b>2</b>	<b>650</b>	<b>30</b>	<b>2.5</b>
<b>DFPW3</b>	<b>DFBW3</b>	<b>3</b>	<b>650</b>	<b>70</b>	<b>3.75</b>
<b>DFPW4</b>	<b>DFBW4</b>	<b>4</b>	<b>650</b>	<b>100</b>	<b>5</b>



**DEL/FLEX** belts with guide  
minimum drum ø (mm)



Belt thickness (mm)	<b>SOUPLEX</b> guide (PU 85 ShA)					<b>SOUPLEX</b> cogged guide				
	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14
2	90	100	140	-	-	-	70	80	-	-
3	110	130	180	220	280	-	85	100	140	200
4	130	170	220	260	350	-	100	120	160	220

Belt thickness (mm)	<b>SUPERFLEX</b> guide (PU 70 ShA)					<b>SUPERFLEX</b> cogged guide				
	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14
2	60	65	90	135	-	-	55	65	90	-
3	80	85	100	150	-	-	70	80	110	-
4	100	100	115	165	-	-	100	100	120	-



**SUPERFLEX** 6 x 4 mm: consult us.



**DEL/FLEX blue**



**Characteristics**

- **Food quality.**
- Easy to clean.
- Resistance to abrasion.
- Resistance to cuttings.
- Resistance to tear.
- Resistance to chemicals.
- Flexible.

**Applications**

- Medium loads.
- Small drum Ø.
- Abrasive conditions.
- U-shape belts.

**Compatible welding processes**

- With welding iron and clamp.
- With hot air gun.
- With heating press.
- With fasteners.

**Guides, profiles, holes... on demand.**

**Smooth or DIAMOND-EMBOSSED bottom side**

- Sliding improved on the belts' support in wet or fat conditions.
- Reduced traction efforts.

**standard embossings**




non-slip studded (PI)



sawtooth (US)



SG3 (SG)



diamond(LO)

Maximum width: 380 mm.




## DEL/FLEX blue

Material	<b>polyurethane</b>
Colour	<b>blue</b>
Bottom side	<b>smooth or diamond-embossed</b>
Top side	<b>smooth</b>
Hardness	<b>93 ShA</b>
Traction rating	
at 1% of tension	<b>10 daN/cm<sup>2</sup> of section</b>
at 2% of tension	<b>15 daN/cm<sup>2</sup> of section</b>
at 3% of tension	<b>20 daN/cm<sup>2</sup> of section</b>
Installation tension	<b>2 to 4% depending on conditions</b>
Extreme temperatures	<b>-20°C/+70°C</b>
Friction coefficient on	
HDPE	<b>0.25</b>
Steel	<b>0.5</b>
Stainless steel	<b>0.6</b>



Reference					
Flat belt width < 100 mm	Conveyor belt width ≥ 100 mm	Belt thickness (mm)	Maximum width (mm)	Minimum drum ø (mm)	Weight (kg / m <sup>2</sup> )
<b>DFPB2</b>	<b>DFBB2</b>	<b>2</b>	<b>1000</b>	<b>30</b>	<b>2.5</b>
<b>DFPB3</b>	<b>DFBB3</b>	<b>3</b>	<b>1000</b>	<b>70</b>	<b>3.75</b>
<b>DFPB2EM</b>	<b>DFBB2EM</b>	<b>2</b>	<b>1000</b>	<b>30</b>	<b>2.5</b>
<b>DFPB3EM</b>	<b>DFBB3EM</b>	<b>3</b>	<b>1000</b>	<b>70</b>	<b>3.75</b>

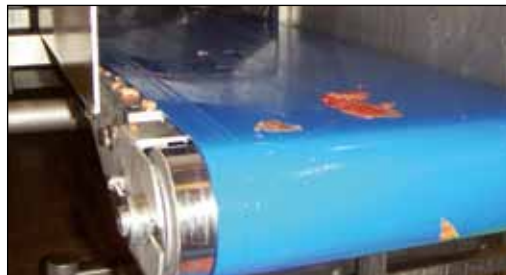

**DEL/FLEX** belts with guide  
minimum drum ø (mm)

Belt thickness (mm)	<b>SOUPLEX</b> guide (PU 85 ShA)					<b>SOUPLEX</b> cogged guide				
	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14
2	90	100	140	-	-	-	70	80	-	-
3	110	130	180	220	280	-	85	100	140	200

Belt thickness (mm)	<b>SUPERFLEX</b> guide (PU 70 ShA)					<b>SUPERFLEX</b> cogged guide				
	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14
2	60	65	90	135	-	-	55	65	90	-
3	80	85	100	150	-	-	70	80	110	-



**SUPERFLEX** 6 x 4 mm: consult us.

**DEL/FLEX white with reinforcement ply**



**Characteristics**

- **Food quality.**
- Low stretch.
- Good sliding on belt's support.
- Resistance to abrasion.
- Resistance to cuttings.
- Resistance to tear.
- Excellent traction rating.
- Flexible.

**Bottom side with REINFORCEMENT ply**

**Applications**

- Medium or heavy loads.
- Long spacing.
- Short tensioning system.

**Compatible welding processes**

- With welding iron and clamp.
- With hot air gun.
- With fasteners.

**Guides, profiles, holes... on demand.**

**standard embossings**



non-slip studded (PI)



sawtooth (US)



SG3 (SG)



diamond(LO)

Maximum width: 380 mm.



**DEL/FLEX white with reinforcement ply**

Material	<b>polyurethane</b>
Colour	<b>white</b>
Bottom side	<b>polyester sheet</b>
Top side	<b>smooth</b>
Hardness	<b>93 ShA</b>
Traction rating	
at 1% of tension	<b>7 daN/cm of width</b>
at 2% of tension	<b>17.5 daN/cm of width</b>
Installation tension	<b>1 at 2% depending on conditions</b>
Extreme temperatures	<b>-20°C/+80°C</b>
Friction coefficient on	
HDPE	<b>0.25</b>
Steel	<b>0.35</b>
Stainless steel	<b>0.35</b>



Reference		Belt thickness (mm)	Maximum width (mm)	Minimum drum ø (mm)	Weight (kg / m <sup>2</sup> )
Flat belt width < 100 mm	Conveyor belt width ≥ 100 mm				
<b>DFPW3RF</b>	<b>DFBW3RF</b>	3	1000	80	3.6



**DEL/FLEX**belts with reinforcement ply and guide minimum drum ø (mm)




Belt thickness (mm)	SUPERFLEX guide (PU 70 ShA)					SUPERFLEX cogged guide				
	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14
3	90	100	120	160	-	-	90	100	130	-

Belt thickness (mm)	V/FLEX guide (PVC 60 ShA)					V/FLEX cogged guide				
	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14
3	80	90	100	120	200	-	80	80	100	-



## SOUPLEX green

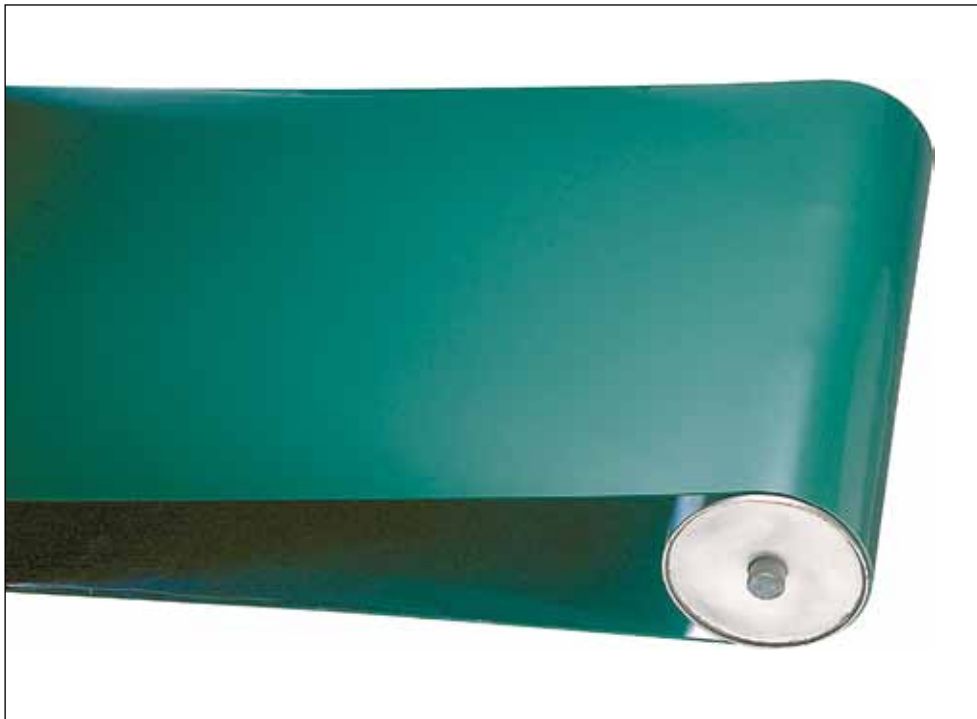

### Characteristics

- **Standard quality.**
- Easy to clean.
- Resistance to abrasion.
- Resistance to cuttings.
- Resistance to tear.
- Resistance to chemicals.
- Grip.
- Very flexible.
- Stretchy.

### Applications

- Light load.
- Short spacing.
- Small drum Ø.

### Compatible welding processes

- With welding iron and clamp.
- With heating press.
- With fasteners.

**Guides, profiles, holes... on demand.**

### standard embossings



non-slip studded (PI)



sawtooth (US)



SG3 (SG)



diamond(LO)

Maximum width: 380 mm.

## SOUPLEX green

Material	<b>polyurethane</b>
Colour	<b>green</b>
Bottom side	<b>smooth</b>
Top side	<b>smooth</b>
Hardness	<b>85 ShA</b>
Traction rating	
at 2% of tension	<b>4 daN/cm<sup>2</sup> of section</b>
at 3% of tension	<b>6 daN/cm<sup>2</sup> of section</b>
at 4% of tension	<b>8 daN/cm<sup>2</sup> of section</b>
Installation tension	<b>3 to 5% depending on conditions</b>
Extreme temperatures	<b>-20°C/+60°C</b>
Friction coefficient on	
HDPE	<b>0.35</b>
Steel	<b>0.6</b>
Stainless steel	<b>0.7</b>



Reference		Belt thickness (mm)	Maximum width (mm)	Minimum drum ø (mm)	Weight (kg / m <sup>2</sup> )
Flat belt width < 100 mm	Conveyor belt width ≥ 100 mm				
<b>SXPG2</b>	<b>SXBG2</b>	<b>2</b>	<b>650</b>	<b>20</b>	<b>2.5</b>
<b>SXPG3</b>	<b>SXBG3</b>	<b>3</b>	<b>650</b>	<b>40</b>	<b>3.75</b>
<b>SXPG4</b>	<b>SXBG4</b>	<b>4</b>	<b>650</b>	<b>60</b>	<b>5</b>



**SOUPLEX belts with guide**  
minimum drum ø (mm)



Belt thickness (mm)	<b>SOUPLEX guide (PU 85 ShA)</b>					<b>SOUPLEX cogged guide</b>				
	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14
<b>2</b>	80	90	130	-	-	-	55	65	-	-
<b>3</b>	100	120	160	200	260	-	70	80	120	180
<b>4</b>	120	140	190	220	280	-	85	100	140	200

Belt thickness (mm)	<b>SUPERFLEX guide (PU 70 ShA)</b>					<b>SUPERFLEX cogged guide</b>				
	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14
<b>2</b>	40	60	80	-	-	-	40	55	-	-
<b>3</b>	60	75	90	140	-	-	50	65	85	-
<b>4</b>	80	90	110	160	-	-	70	80	100	-



**SUPERFLEX 6 x 4 mm:** consult us.

**SOUPLEX white/blue**



**Characteristics**

- **Food quality.**
- Easy to clean.
- Resistance to abrasion.
- Resistance to cuttings.
- Resistance to tear.
- Resistance to chemicals.
- Grip.
- Very flexible.
- Stretchy.

**Applications**

- Light load.
- Short spacing.
- Small drum Ø.

**Compatible welding processes**

- With welding iron and clamp.
- With heating press.
- With fasteners.

**Guides, profiles, holes... on demand.**

**standard embossings**



non-slip studded (PI)



sawtooth (US)



SG3 (SG)



diamond(LO)

Maximum width: 380 mm.





## SOUPLEX white/blue

Material	<b>polyurethane</b>
Colour	<b>white/blue</b>
Bottom side	<b>smooth</b>
Top side	<b>smooth</b>
Hardness	<b>85 ShA</b>
Traction rating	
at 2% of tension	<b>4 daN/cm<sup>2</sup> of section</b>
at 3% of tension	<b>6 daN/cm<sup>2</sup> of section</b>
at 4% of tension	<b>8 daN/cm<sup>2</sup> of section</b>
Installation tension	<b>3 to 5% depending on conditions</b>
Extreme temperatures	<b>-20°C/+60°C</b>
Friction coefficient on	
HDPE	<b>0.35</b>
Steel	<b>0.6</b>
Stainless steel	<b>0.7</b>



Reference					
Flat belt width < 100 mm	Conveyor belt width ≥ 100 mm	Belt thickness (mm)	Maximum width (mm)	Minimum drum ø (mm)	Weight (kg / m <sup>2</sup> )
<b>SXPW2</b>	<b>SXBW2</b>	<b>2</b>	<b>650</b>	<b>20</b>	<b>2.5</b>
<b>SXPW3</b>	<b>SXBW3</b>	<b>3</b>	<b>650</b>	<b>40</b>	<b>3.75</b>
<b>SXPW4</b>	<b>SXBW4</b>	<b>4</b>	<b>650</b>	<b>60</b>	<b>5</b>
<b>SXPB2</b>	<b>SXBB2</b>	<b>2</b>	<b>380</b>	<b>20</b>	<b>2.5</b>



SOUPLEX belts with guide  
minimum drum ø (mm)



Belt thickness (mm)	SOUPLEX guide (PU 85 ShA)					SOUPLEX cogged guide				
	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14
2	80	90	130	-	-	-	55	65	-	-
3	100	120	160	200	260	-	70	80	120	180
4	120	140	190	220	280	-	85	100	140	200

Belt thickness (mm)	SUPERFLEX guide (PU 70 ShA)					SUPERFLEX cogged guide				
	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14	8 x 5	10 x 6	13 x 8	17 x 11	22 x 14
2	40	60	80	-	-	-	40	55	-	-
3	60	75	90	140	-	-	50	65	85	-
4	80	90	110	160	-	-	70	80	100	-



SUPERFLEX 6 x 4 mm: consult us.